

Desktop Smart Card Reader/Writer

V4DF

Desktop Manual Insertion Smart Card Reader/Writer with RS-232C Interface and Housing

- Lightweight and small design for desktop use
- Lifts smart card onto contacts to reduce wear on the card's contacts
- Data is protected even if the card is inadvertently removed from the reader while active
- Card-locking system with push-button release
- Supports transmission protocols T=0 and T=1; also supports EMV



Ordering Information

Magnetic Tracks Supported (R, R/W)											
1	2	3	Center	JIS II	IC Contact	Interface	Card Lock	Cable	Cover	Color	Part Number
_	_	_	_	-	ISO 7816	RS-232C	Manual	Option	Yes	Ivory	V4DF-0J-01V

■ ACCESSORIES

Item	Part Number
Cable	V4BF/DF Cable

■ TYPICAL APPLICATIONS

- Electronic purse
- Access control
- Pay TV
- ID card verification
- Network Access
- · PC Peripherals

Specifications _____

Recommended card type		ISO7816/1-4		
Data transmission		1200, 2400, 4800, 9600, 19200, 38400 bps (automatically set)		
Data mode		Asynchronous mode		
Operating power supply		12 VDC ±10% (Supplied by AC adaptor) (including ripple)		
Current consumption		130 mA max.		
Interface connector		Hirose TM11R-5C-88 (RJ 45)		
Ambient temperature	Operation	0° to 45°C (32° to 113°F)		
	Storage	-15° to 60°C (5° to 140°F)		
Ambient humidity	Operation	30% to 85% RH		
	Storage	20% to 90% RH		
Durable vibration		10 to 150 Hz, half amplitude 0.15 mm (2 G max.)		
Durable shock		20 G		
Dimensions		74 (W) x 124 (D) x 59 (H) mm		
Weight		Approx. 200 g		
Service life IC contact		300,000 times min.		

Engineering Data _____

■ I/O INFORMATION


RS-232C interface cable pin location

PC side (D-SU	B 9P)	C/R side (RJ-45 8P)			
Pin No.	Signal	Pin No.	Signal		
1			_		
2	RxD	8	TxD		
3	TxD	7	RxD		
4	_	_	_		
5	0V	4	0V		
6	DSR	6	DTR		
7	RTS	5	CTS		
8	CTS		_		
9			_		
Cover	0V	1, 2	0V		

Dimensions

Unit: mm (inch)

■ V4DF-0J-01V

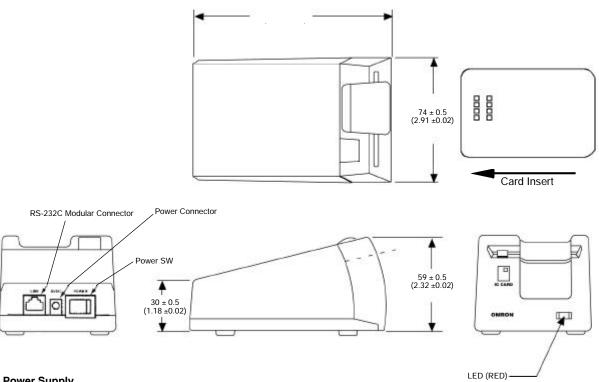

Power Supply AC adapter (12V DC, over 130mA) is to be procured locally.



V4DF — V4DF

NOTE: DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters to inches divide by 25.4.

OMRON ELECTRONICS, INC.
One East Commerce Drive
Schaumburg, IL 60173
1-800-55-OMRON

OMRON CANADA, INC. 885 Milner Avenue Scarborough, Ontario M1B 5V8

416-286-6465

Cat. No. GC CR3

7/00

Specifications subject to change without notice.

Printed in U.S.A.